

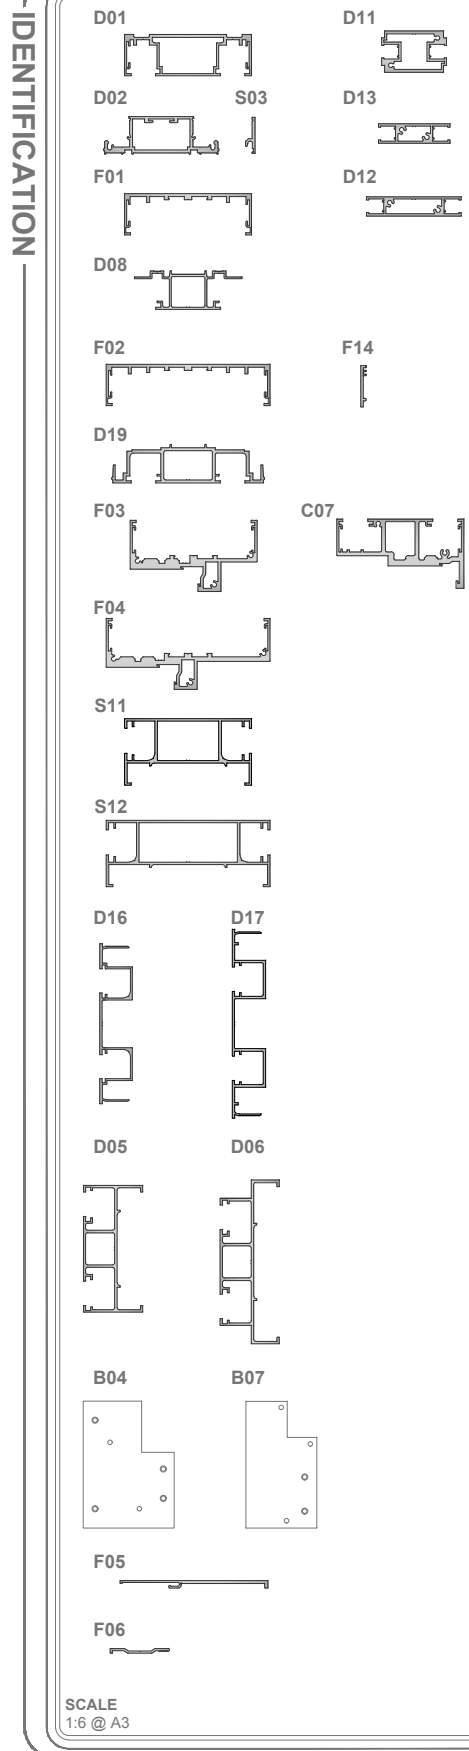




# PROFILE

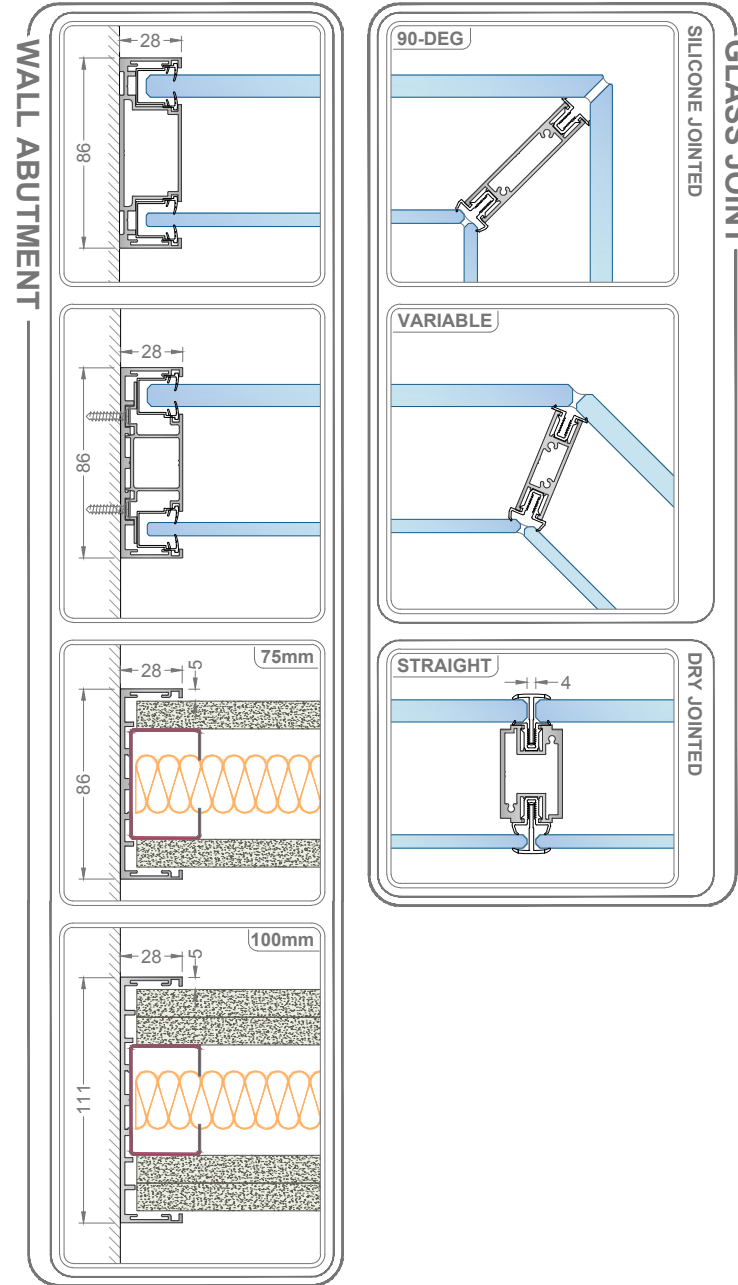



# HEAD & BASE

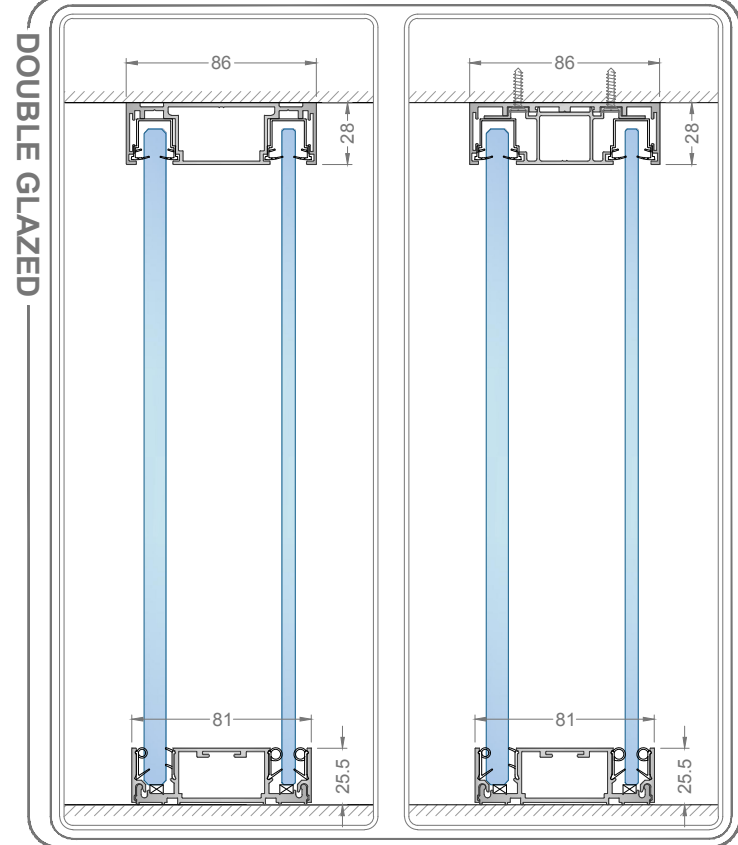

# HEAD & BASE

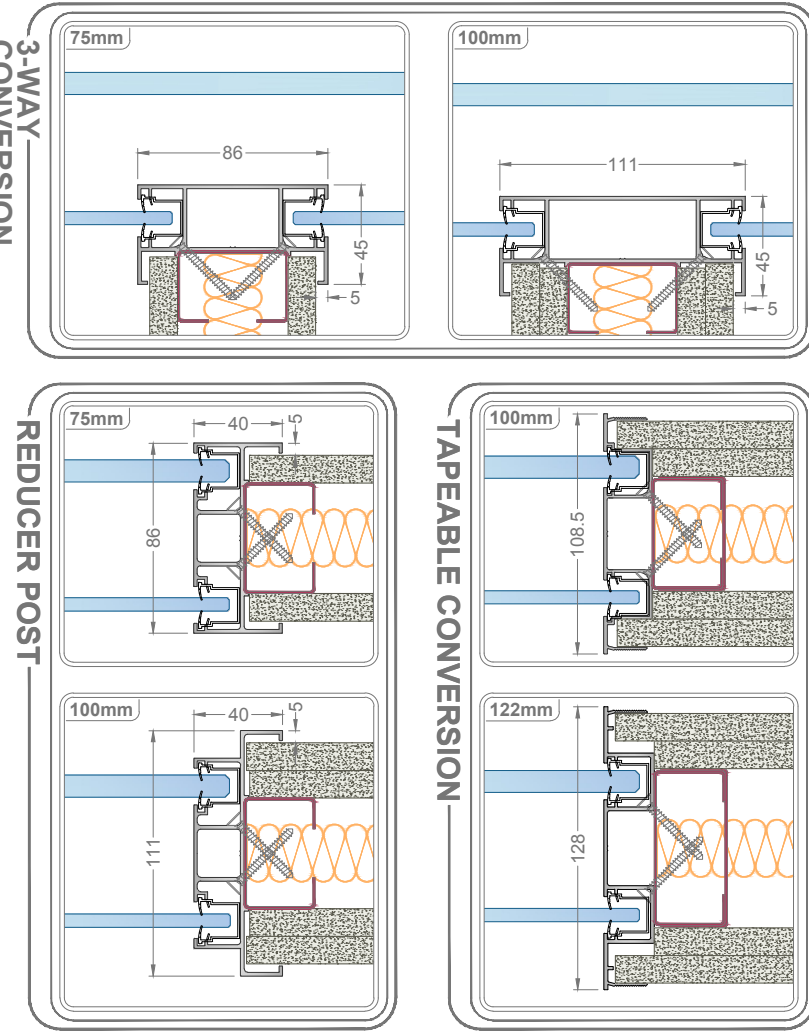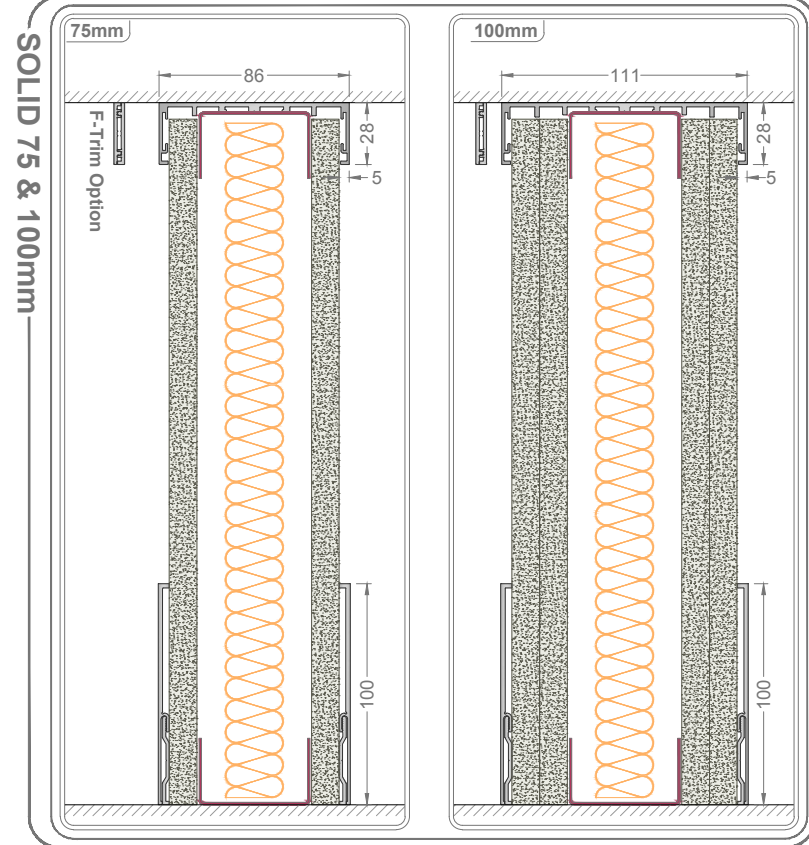

# DOORFRAMES

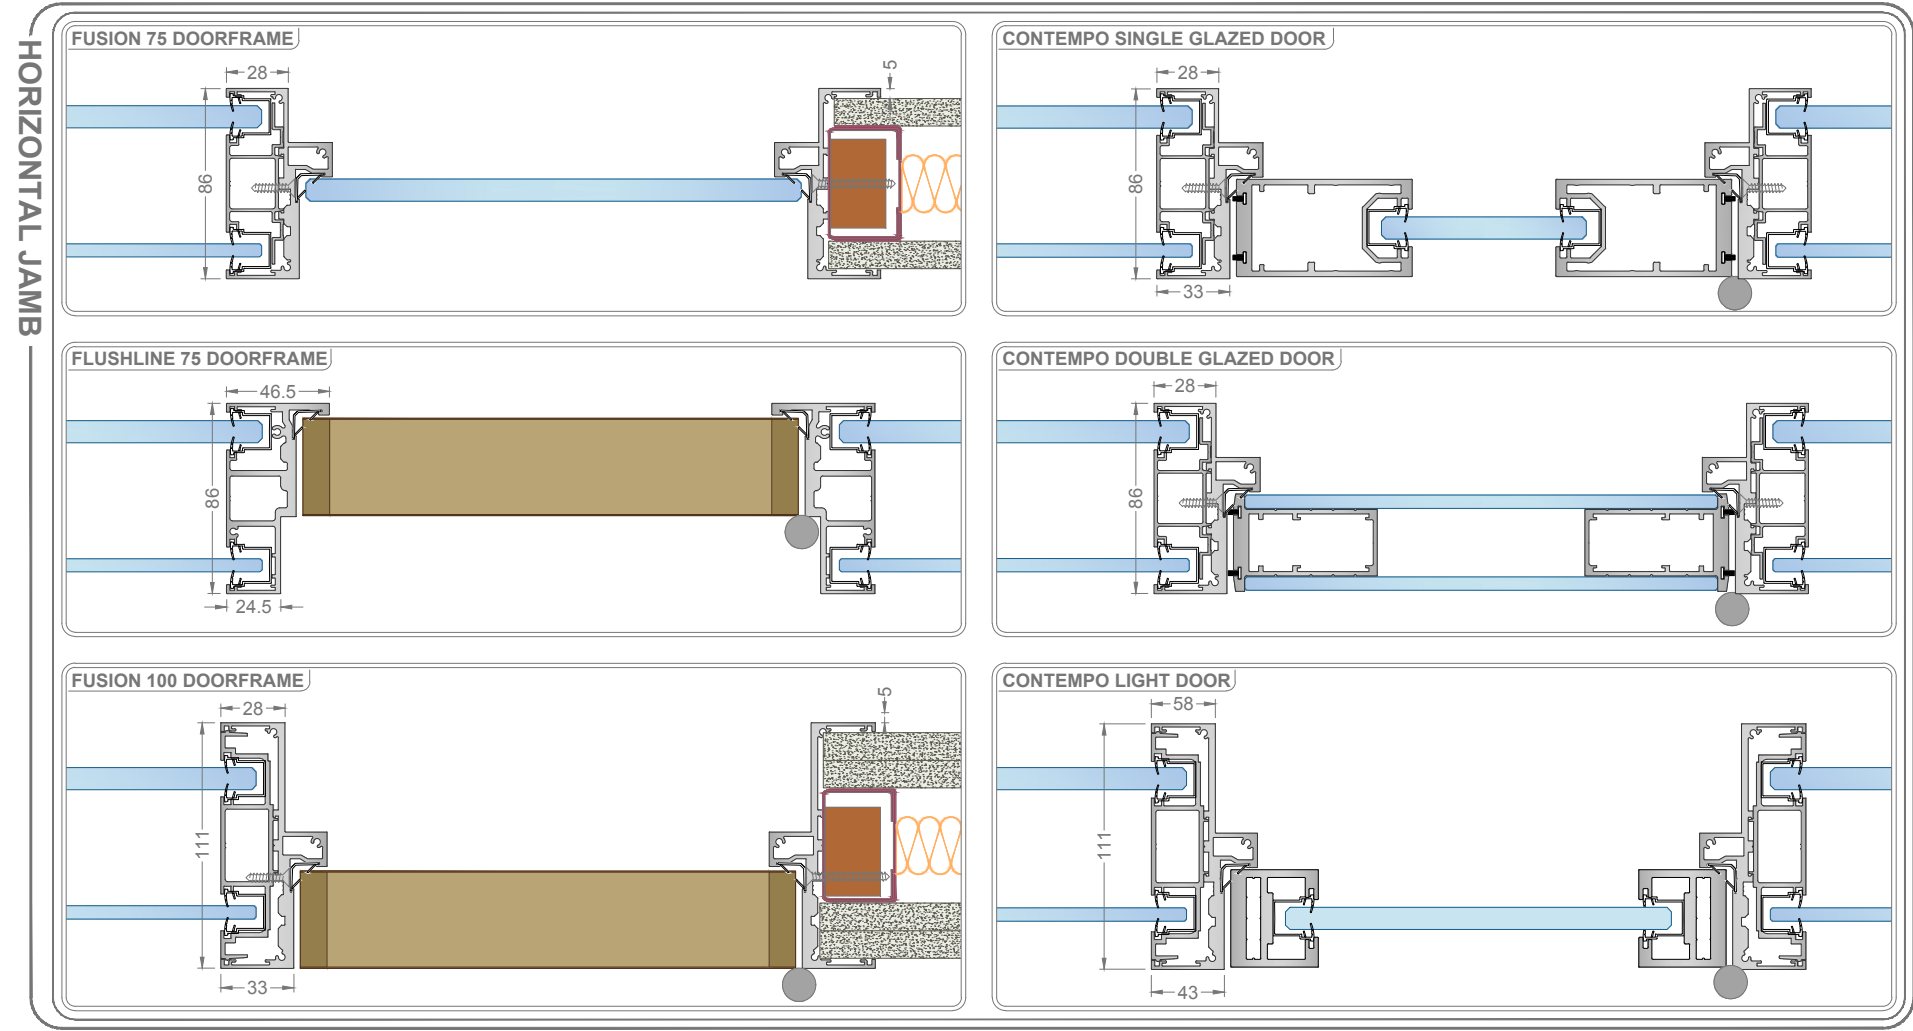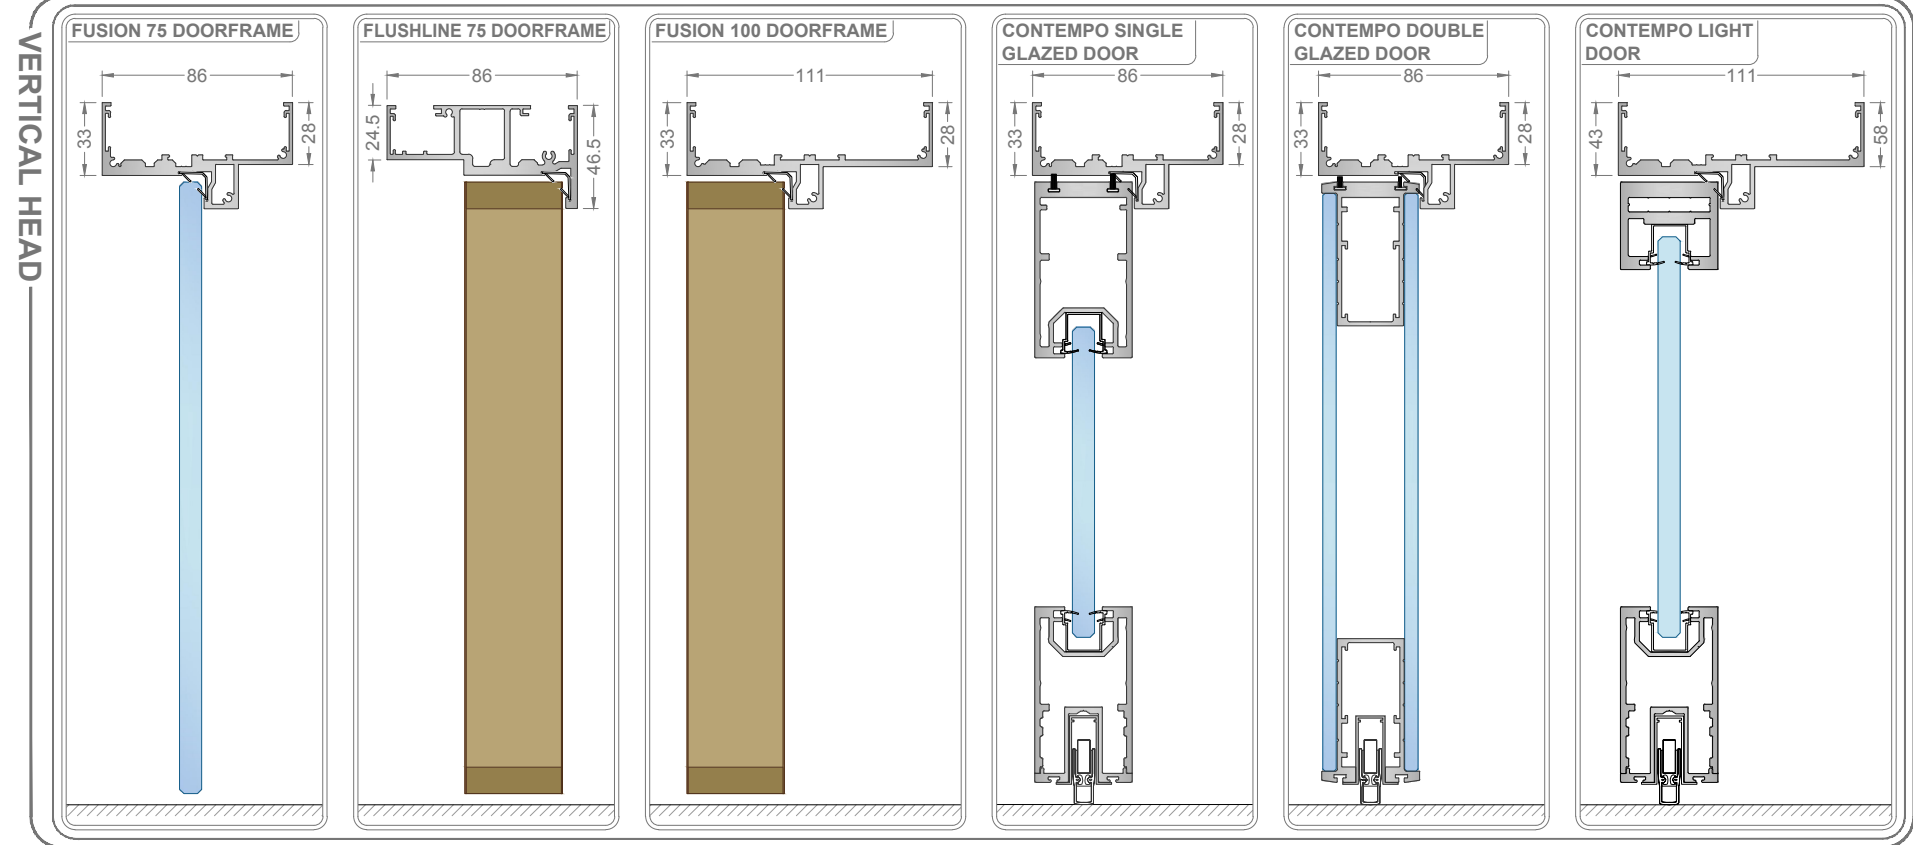

## Performance Summary

System Title: Frequency 75 Double Glazed With Mullions

Document No.	Description	Rw
CDG-AP3	6 & 10mm Toughened Glass	42 dB
CDG-AP4	10 Toughened & 12.8mm Acoustic Safety Glass	48 dB
CDG-AP5	10.8 & 12.8mm Acoustic Safety Glass	49 dB
CDG-AP10	12.8 & 12.8mm Acoustic Safety Glass	50 dB
CGD-AP10	Contempo 12mm Toughened Glass Door	36 dB
CGD-AP1	Contempo 12.8mm Acoustic Safety Glass Door	40 dB
CGD-AP2	Contempo 6 & 6mm Toughened Glass Door	41 dB
CGD-AP7	Contempo Type 'S' Double Glazed Door	46 dB
CLGD-AP1	Contempo Light 12mm Toughened Glass Door	38 dB
CLGD-AP2	Contempo Light 12.8mm Acoustic Safety Glass Door	41 dB
FTD-AP4	Timber Door 44mm in Aluminium Frame	36 dB
FTD-AP5	Timber Door 54mm in Aluminium Frame	36 dB
FTD-AP1	Timber Door 44mm in Aluminium Frame	37 dB